



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
09.03.2005 Bulletin 2005/10

(51) Int Cl.7: **D01D 4/06, D01D 5/098,  
D01D 5/30**

(21) Application number: **04020094.1**

(22) Date of filing: **25.08.2004**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**  
Designated Extension States:  
**AL HR LT LV MK**

(72) Inventors:  
• **Allen, Martin A.**  
Gainesville, Georgia 30503 (US)  
• **Simms, William Todd**  
Cummings, Georgia 30041 (US)  
• **Thompson, Matthew Duane**  
Cummings, Georgia 30040 (US)

(30) Priority: **28.08.2003 US 650540**


(71) Applicant: **NORDSON CORPORATION**  
Westlake, Ohio 44145-1119 (US)

(74) Representative: **Eisenführ, Speiser & Partner**  
Patentanwälte Rechtsanwälte  
Postfach 10 60 78  
28060 Bremen (DE)

(54) **Lamellar meltblowing die apparatus and method**

(57) A lamellar die apparatus (10) for extruding a heated liquid into filaments and directing air at the filaments. The apparatus includes a plurality of plates (16a-c, 18a-c, 20) each having opposite side faces. At least two of the side faces confront each other and have a liquid passage positioned therebetween for transferring the heated liquid. At least two of the side faces confront each other and have an air passage (26) positioned

therebetween for transferring the air. At least two of the side faces confront each other and have a heating element passage therebetween. A heating element (74, 76) is positioned within the heating element passage for heating at least two of the plates. An extrusion-die is coupled with the plurality of plates and communicates with the liquid passage and the air passage for discharging the heated liquid as multiple filaments and for discharging the air at the filaments.

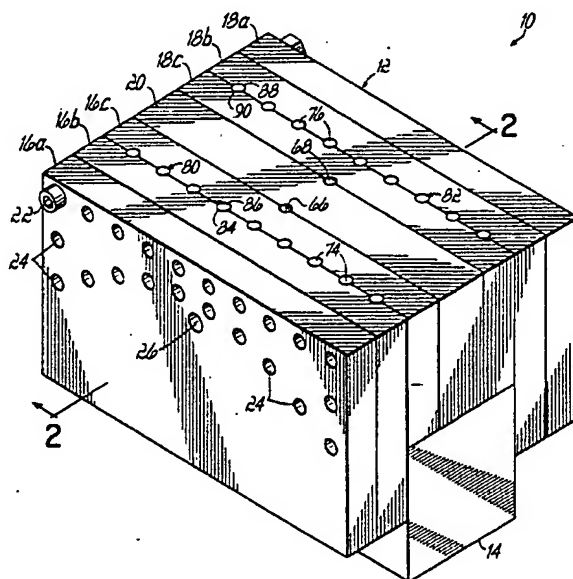

**FIG. 1**

## Description

### Field of the Invention

[0001] The present invention generally relates to apparatus and methods for extruding thermoplastic filaments and, more particularly, apparatus for melt blowing multi-component or single component filaments.

### Background of the Invention

[0002] Melt spinning techniques, such as spunbonding or meltblowing techniques, for extruding fine diameter filaments find many different applications in various industries including, for example, in nonwoven material manufacturing. This technology generally involves extruding a thermoplastic material from multiple rows of discharge outlets extending along the lower surface of an elongate spinneret. Spunbonded and/or meltblown materials are used in such products as diapers, surgical gowns, carpet backings, filters and many other consumer and industrial products. The machines for meltspinning such materials can be very large and include numerous filament discharge outlets.

[0003] For certain applications, it is desirable to utilize two or more types of thermoplastic liquid materials to form individual cross-sectional portions of each filament. Often, these multi-component filaments comprise two components and, therefore, are referred to as bi-component filaments. For example, when manufacturing nonwoven materials for use in the garment industry, it may be desirable to produce bicomponent filaments having a sheath-core construction. The outer sheath may be formed from a softer material which is comfortable to the skin of an individual and the inner core may be formed from a stronger, but perhaps less comfortable material having greater tensile strength to provide durability to the garment. Another important consideration involves cost of the material. For example, a core of inexpensive material may be combined with a sheath of more expensive material. For example, the core may be formed from polypropylene or nylon and the sheath may be formed from a polyester or co-polyester. Many other multi-component fiber configurations exist, including side-by-side, tipped, and microdenier configurations, each having its own special applications. Various material properties can be controlled using one or more of the component liquids. These include, as examples, thermal, chemical, electrical, optical, fragrance, and anti-microbial properties. Likewise, many types of die tips exist for combining the multiple liquid components just prior to discharge or extrusion to produce filaments of the desired cross-sectional configuration.

[0004] One problem associated with multi-component extrusion apparatus involves the cost and complexity of the manifolds used to transmit liquid(s) to the spinneret or extrusion die. Typical manifolds are typically machined with many different passages to ensure that the

proper flow of each component liquid reaches the die under the proper pressure and temperature conditions. These manifolds are therefore relatively complex and expensive components of the melt spinning apparatus.

[0005] For these reasons, it would be desirable to provide a meltblowing apparatus having a manifold system which may be easily manufactured while still achieving the goal of effectively transmitting the heated liquid or liquids to the die tip.

### Summary of the Invention

[0006] The invention generally provides a lamellar meltblowing die apparatus for extruding a heated liquid into filaments and directing air at the filaments. The apparatus is constructed with a plurality of plates each having opposite side faces. At least two of the side faces confront each other and have a liquid passage positioned therebetween for transferring the heated liquid. At least two of the side faces confront each other and have an air passage positioned therebetween for transferring the air. At least two of the side faces confront each other and have a heating element passage therebetween. A heating element is positioned within the heating element passage for heating at least one of the liquid and the air. An extrusion die is coupled with the plurality of plates and communicates with the liquid passage and the air passage for discharging the heated liquid as multiple filaments and for discharging the air at the filaments. The air may, for example, be heated or unheated process air with or without quench air.

[0007] The liquid passage is preferably formed by respective first and second recesses on adjacent plates that abut one another. Likewise, the air passage is formed by respective third and fourth recesses on adjacent plates that abut one another, and the heating element passage is formed by respective fifth and sixth recesses on adjacent plates that abut one another. Recesses from different ones of these pairs of recesses may, for example, be located on opposite sides of the same plate. In the preferred embodiment, multiple heating element passages are positioned between two of the plates and multiple heating elements are respectively contained in the heating element passages. The heating element passage or passages are preferably located between the liquid passage and the air passage.

[0008] The liquid passage and the air passage each include an inlet portion and an outlet portion with the outlet portion being wider than the inlet portion. The outlet portion of the liquid passage forms an elongate liquid outlet slot. A plurality of distribution passages communicate with an elongate air outlet slot in one of the plates and the distribution passages further communicate with the air passage. The extrusion die includes an elongate liquid inlet slot and an elongate air inlet slot respectively aligned in communication with the elongate liquid outlet slot and the elongate air outlet slot.

[0009] The invention further contemplates methods of

meltblowing liquid filaments, such as single or multiple component thermoplastic polymeric filaments, in general accordance with the use of the apparatus described above.

[0010] Various advantages, objectives, and features of the invention will become more readily apparent to those of ordinary skill in the art upon review of the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings.

### **Brief Description of the Drawings**

[0011]

Fig. 1 is a perspective view of a multi-component meltblowing apparatus constructed in accordance with a preferred embodiment of the invention.

Fig. 1A is an exploded perspective view of the apparatus shown in Fig. 1.

Fig. 2 is a cross sectional view taken along line 2-2 of Fig. 1.

Fig. 3 is a fragmented view of the assembled apparatus taken generally along line 3-3 of Fig. 2.

Fig. 4 is a cross sectional view similar to Fig. 2, but illustrating an alternative embodiment of the apparatus.

Fig. 5 is a cross sectional view taken along line 5-5 of Fig. 4.

Fig. 6 is a cross sectional view similar to Fig. 2, but illustrating another alternative embodiment of the apparatus.

Fig. 7 is a cross sectional view similar to Fig. 4, but illustrating another alternative embodiment of the apparatus.

### **Detailed Description**

[0012] Figs. 1, 1A, 2 and 3 illustrate a die apparatus 10 constructed in accordance with a first embodiment. Apparatus 10 is comprised of a manifold structure 12 coupled for fluid communication with an extrusion die 14. Manifold structure 12 is a lamellar construction or plate assembly comprised of multiple plates 16a-c, 18a-c and 20. These plates are securely fastened together in side-by-side relation using appropriate fasteners 22 (only one shown in Fig. 1) extending through holes 24 in each of the plates. As best shown in Fig. 2, respective outside pairs of plates 16a, 16b and 18a, 18b form process air manifold sections and include respective air input ports 26, 28. Plates 16a, 16b and 18a, 18b respectively abut each other and contain air passages 27, 29 therebetween. Air passages 27, 29 are respectively formed by pairs of recesses 30, 32 and 34, 36 that align with each other in abutting faces of the plates 16a, 16b and 18a, 18b.

[0013] As shown best in Fig. 1A, these recesses 30, 32 and 34, 36 take the form of so-called coat hanger

recesses which become wider in dimension from the inlet portion 40 located proximate input ports 26, 28 to an outlet portion 42 located proximate respective distribution passages 44. Distribution passages 44 extend respectively through plates 16b and 18b and lead to similar distribution passages 46, 48 in plates 16c and 18c and, finally, into elongate air outlet slots 50, 52 which extend lengthwise along the undersides of plates 16c, 18c and communicate with coextensive elongate inlet slots 53, 55 in the top of the extrusion die 14. Plates 16c and 18c respectively abut central plate 20.

[0014] Respective liquid passages 54, 56 are formed between plates 16c, 20 and 18c, 20 and, again, are formed by respective pairs of coat hanger recesses 58, 60 and 62, 64 that align with each other in abutting surfaces of these plates 16c, 20 and 18c, 20. As shown in Fig. 1A, these recesses 58, 60 and 62, 64 are also formed with a coat hanger configuration between inlet portions adjacent respective liquid input ports 66, 68 and outlet portions which form elongate liquid outlet slots 70, 72 for abutting the top surface of the extrusion die 14 and aligning with coextensive liquid inlet slots 73, 75. In this embodiment, the two liquid input ports 66, 68 and coat hanger passages 54, 56 are provided for producing bicomponent filaments from extrusion die 14. Extrusion die 14 may be any suitable extrusion die having, for example, a laminated plate construction with appropriate porting and passages to combine and extrude filaments from the outlet orifices extending along the underside of the extrusion die 14 and to attenuate or otherwise affect those filaments with process air. Representative dies are, for example, disclosed in U.S. Patent Nos. 5,562,930; 5,551,588; and 5,344,297, however, such dies would require modification with suitable passages (not shown) to transfer and discharge process air received from air outlet slots 50, 52.

[0015] Also in accordance with the invention, heating elements 74, 76 are respectively contained in passages 80, 82 between plates 16b, 16c and 18b, 18c. Each passage is again preferably formed by respective pairs of aligned and abutting recesses 84, 86 and 88, 90 in plates 16b, 16c and 18b, 18c. These heating elements 74, 76, which are preferably electrically operated heating elements, may be advantageously situated between the respective air and liquid passages 27, 54 and 29, 56 so as to heat both the liquid and the air traveling to extrusion die 14. Sufficient heat may also be supplied to heat the extrusion die 14 itself to the appropriate operating temperature.

[0016] Figs. 4 and 5 illustrate another apparatus 100 constructed in accordance with the invention. In this embodiment, apparatus 100 again comprises a multiple plate assembly or manifold structure 102 coupled with an extrusion die 104. Manifold structure 102 is similar to that described with respect to the first embodiment in that a seven plate construction 106a-c, 108a-c, 110 is used for providing both process air and two component liquids, such as polymers, to the extrusion die 104. How-

ever, in this embodiment, two additional plates 112, 114 have been added to the outside of the manifold structure 102 to supply quenching air through respective input ports 116, 118 and air passages 120, 122 in the form of coat hanger passages as described above, and respective transfer passages 124, 126 and 128, 130 respectively extending through plates 106a, 106b and 108a, 108b and communicating with appropriate passages (not shown) in the extrusion die 104. This quenching air functions to cool the filaments after they have been discharged.

[0017] As further shown in Figs. 4 and 5, input ports 140, 142 are provided for introducing two different component liquids, such as two different types of polymer materials, into apparatus 100. In addition, input ports 144, 146 are provided for process air. Liquid input ports 140, 142 communicate with respective pairs of abutting and aligned recesses 148, 150 and 152, 154 which form coat hanger passages and communicate directly with elongate slots (not shown) in the top of extrusion die 104. Input ports 144, 146 communicate with respective pairs of abutting recesses 156, 158 and 160, 162 in plates 106a, 106b and 108a, 108b. These recess 156, 158 and 160, 162 also form coat hanger air passages which communicate with respective elongate slots 164, 166 in plates 106c, 108c through respective transfer passages 168, 170 and 172, 174 in plates 106b, 106c and 108b, 108c to provide process or attenuating air to die 104. Passages 120, 122 are likewise formed as coat hanger passages formed by abutting recesses 176, 178 and 180, 182 having narrower portions adjacent input ports 116 and 118 and wider portions adjacent respective transfer passages 124 and 128. Electric heaters 184, 186 are provided as in the first embodiment.

[0018] Fig. 6 illustrates another alternative die apparatus 200 having a laminated plate construction. This apparatus 200 is similar to that described above with respect to the first embodiment (Figs. 1, 1A, 2, 3), but is configured to discharge single component filaments or monofilaments rather than a bicomponent filament. Thus, the central plate 20 used in the first embodiment has been eliminated thereby resulting in a six plate construction rather than a seven plate construction for manifold structure 202. As with the previous embodiments, an extrusion die 204 is coupled to manifold structure 202 for discharging one or more filaments and, optionally, discharging air to facilitate a meltblowing operation. However, for spunbond apparatus, it will be appreciated that the process air passages and structure associated therewith may be eliminated. A single liquid input port 206 and coat hanger passage 208 receive the liquid, such as a thermoplastic polymer. Coat hanger passage 208 is formed by aligned recesses 210, 212 in abutting faces of plates 16c' and 18c'. Plates 16c' and 18c' are designated with prime marks (') to denote that they are slightly modified, as illustrated, from plates 16c, 18c. All other aspects of apparatus 200 are as described above with respect to the first embodiment and, therefore,

identical reference numerals have been used and no further description is necessary.

[0019] Fig. 7 illustrates another alternative apparatus 220 similar to that described above with respect to Figs. 4 and 5 but, like the embodiment of Fig. 6, apparatus 220 is configured to discharge single component filaments or monofilaments rather than bicomponent filaments. Again, the central plate 110 of the embodiment illustrated in Figs. 4 and 5 has been eliminated and an eight plate manifold structure 222 results. Manifold structure 222 is configured to deliver liquid, process air and quench air to an extrusion die 224. A single liquid input port 206 and a coat hanger passage 208 is formed between abutting plates 106c', 108c' to communicate with an appropriate elongate inlet slot (not shown) in the top of the extrusion die 224. Plates 106c' and 108c' are designated with prime marks (') to denote that they are slightly modified, as illustrated, from plates 106c, 108c. All other aspects of the embodiment shown in Fig. 7 are described with respect to the embodiment of Figs. 4 and 5 and, therefore, identical reference numerals have been used and no further description is necessary.

[0020] While the present invention has been illustrated by a description of various preferred embodiments and while these embodiments have been described in some detail, it is not the intention of the Applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. The various features of the invention may be used alone or in numerous combinations depending on the needs and preferences of the user. This has been a description of the present invention, along with the preferred methods of practicing the present invention as currently known. However, the invention itself should only be defined by the appended claims, wherein we claim:

## Claims

1. A lamellar die apparatus for meltblowing a heated liquid into filaments and directing air at the filaments, comprising:

a plurality of plates each having opposite side faces, at least two of said side faces confronting each other and having a liquid passage positioned therebetween for transferring the heated liquid, at least two of said side faces confronting each other and having an air passage positioned therebetween for transferring the air, and at least two of said side faces confronting each other and having a heating element passage therebetween,  
a heating element positioned within said heating element passage for heating at least two of said plates, and  
an extrusion die coupled with said plurality of

plates and communicating with said liquid passage and said air passage for discharging the heated liquid as multiple filaments and for discharging the air at the filaments.

2. The apparatus of claim 1, wherein said liquid passage is formed by respective first and second recesses on different ones of said plates which abut one another, said air passage is formed by respective third and fourth recesses on different ones of said plates which abut one another, and said heating element passage is formed by respective fifth and sixth recesses on different ones of said plates which abut one another.

3. The apparatus of claim 1, further comprising a plurality of heating element passages positioned between two of said plates and a plurality of heating elements respectively contained in said plurality of heating element passages.

4. The apparatus of claim 1, wherein said heating element passage is located between said liquid passage and said air passage such that said heating element heats the liquid in said liquid passage and the air in said air passage.

5. The apparatus of claim 1, wherein said liquid passage and said air passage each include an inlet portion and an outlet portion, said outlet portion being wider than said inlet portion.

6. The apparatus of claim 5, wherein said outlet portion of said liquid passage forms an elongate liquid outlet slot.

7. The apparatus of claim 6, further comprising a plurality of distribution passages communicating with an elongate air outlet slot in one of said plates, said distribution passages further communicating with said air passage.

8. The apparatus of claim 7, wherein said extrusion die includes an elongate liquid inlet slot and an elongate air inlet slot respectively aligned in communication with said elongate liquid outlet slot and said elongate air outlet slot.

9. A lamellar die apparatus for meltblowing at least two heated liquids into multi-component filaments and directing air at the filaments, comprising:

a plurality of plates each having opposite side faces, at least two of said side faces confronting each other and having a first liquid passage positioned therebetween for transferring a first heated liquid, at least two of said side faces confronting each other and having a second liq-

uid passage positioned therebetween for transferring a second heated liquid, at least two of said side faces confronting each other and having an air passage positioned therebetween for transferring the air, and at least two of said side faces confronting each other and having a heating element passage therebetween, a heating element positioned within said heating element passage for heating at least two of said plates, and an extrusion die coupled with said plurality of plates and communicating with said first and second liquid passages and said air passage for discharging the first and second heated liquids as the multi-component filaments and for discharging the air at the filaments.

10. The apparatus of claim 9, wherein said first liquid passage is formed by respective first and second recesses on different ones of said plates which abut one another, said second liquid passage is formed by respective third and fourth recesses on different ones of said plates which abut one another, said air passage is formed by respective fifth and sixth recesses on different ones of said plates which abut one another, and said heating element passage is formed by respective seventh and eighth recesses on different ones of said plates which abut one another.

11. The apparatus of claim 9, further comprising a plurality of heating element passages positioned between two of said plates and a plurality of heating elements respectively contained in said plurality of heating element passages.

12. The apparatus of claim 9, wherein said heating element passage is located between said first liquid passage and said air passage such that said heating element heats the liquid in said first liquid passage and the air in said air passage.

13. The apparatus of claim 9, wherein said first and second liquid passages and said air passage each include an inlet portion and an outlet portion, said outlet portion being wider than said inlet portion.

14. The apparatus of claim 13, wherein said outlet portions of said first and second liquid passages form respective elongate first and second liquid outlet slots.

15. The apparatus of claim 14, further comprising a plurality of distribution passages communicating with an elongate air outlet slot in one of said plates, said distribution passages further communicating with said air passage.

16. The apparatus of claim 15, wherein said extrusion die includes first and second elongate liquid inlet slots respectively aligned in communication with said first and second elongate liquid outlet slots and an elongate air inlet slot aligned in communication with said elongate air outlet slot.
17. The apparatus of claim 16, further comprising a second air passage positioned between two of said side faces, said second air passage communicating with said extrusion die such that air is discharged from said extrusion die on opposite sides of the filaments.
18. The apparatus of claim 17, wherein said heating element passage is located between said first liquid passage and said air passage such that said heating element heats the first liquid in said first liquid passage and the air in said air passage, and further comprising a second heating element passage positioned between two of said side faces and containing a second heating element for heating at least two of said plates, said second heating element further located between said second liquid passage and said second air passage such that said second heating element heats the second liquid in said second liquid passage and the air in said second air passage.
19. A method of meltblowing filaments of first liquid, comprising:
- introducing the first liquid between a pair of plates in a manifold assembly;
  - introducing process air between a pair of plates in the manifold assembly;
  - directing the first liquid from the manifold assembly into an extrusion die;
  - directing the process air from the manifold assembly into the extrusion die;
  - discharging the first liquid from the extrusion die as a plurality of filaments;
  - discharging the process air from the extrusion die to attenuate the filaments; and
  - collecting the filaments to form a web.
20. The method of claim 19, further comprising:
- introducing a second liquid between a pair of plates in the manifold assembly;
  - directing the second liquid from the manifold assembly into the extrusion die;
  - combining the first and second liquids;
  - discharging the first and second liquids from the extrusion die as a plurality of multi-component filaments;
  - discharging the process air from the extrusion die to attenuate the multi-component filaments;
- and collecting the multi-component filaments to form a web.
21. The method of claim 20, further comprising:
- heating at least one of the first liquid and the process air in the manifold assembly with a heater positioned between a pair of plates of the manifold assembly.
22. The method of claim 20, further comprising:
- introducing quench air between a pair of plates in the manifold assembly;
  - directing the quench air from the manifold assembly into the extrusion die;
  - discharging the quench air from the extrusion die to quench the filaments.
23. The method of claim 19, further comprising:
- heating at least one of the first liquid and the process air in the manifold assembly with a heater positioned between a pair of plates of the manifold assembly.
24. The method of claim 19, further comprising:
- introducing quench air between a pair of plates in the manifold assembly;
  - directing the quench air from the manifold assembly into the extrusion die;
  - discharging the quench air from the extrusion die to quench the filaments.

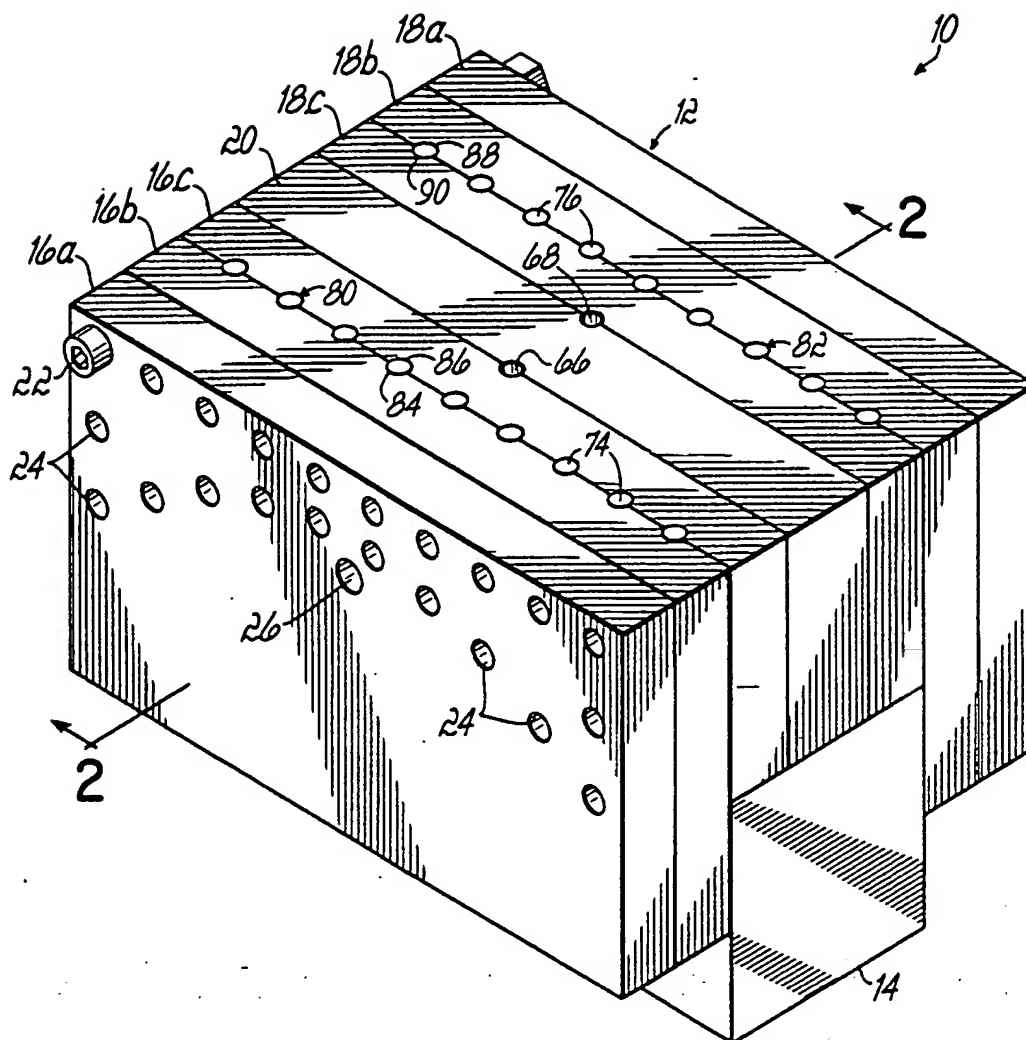


FIG. 1

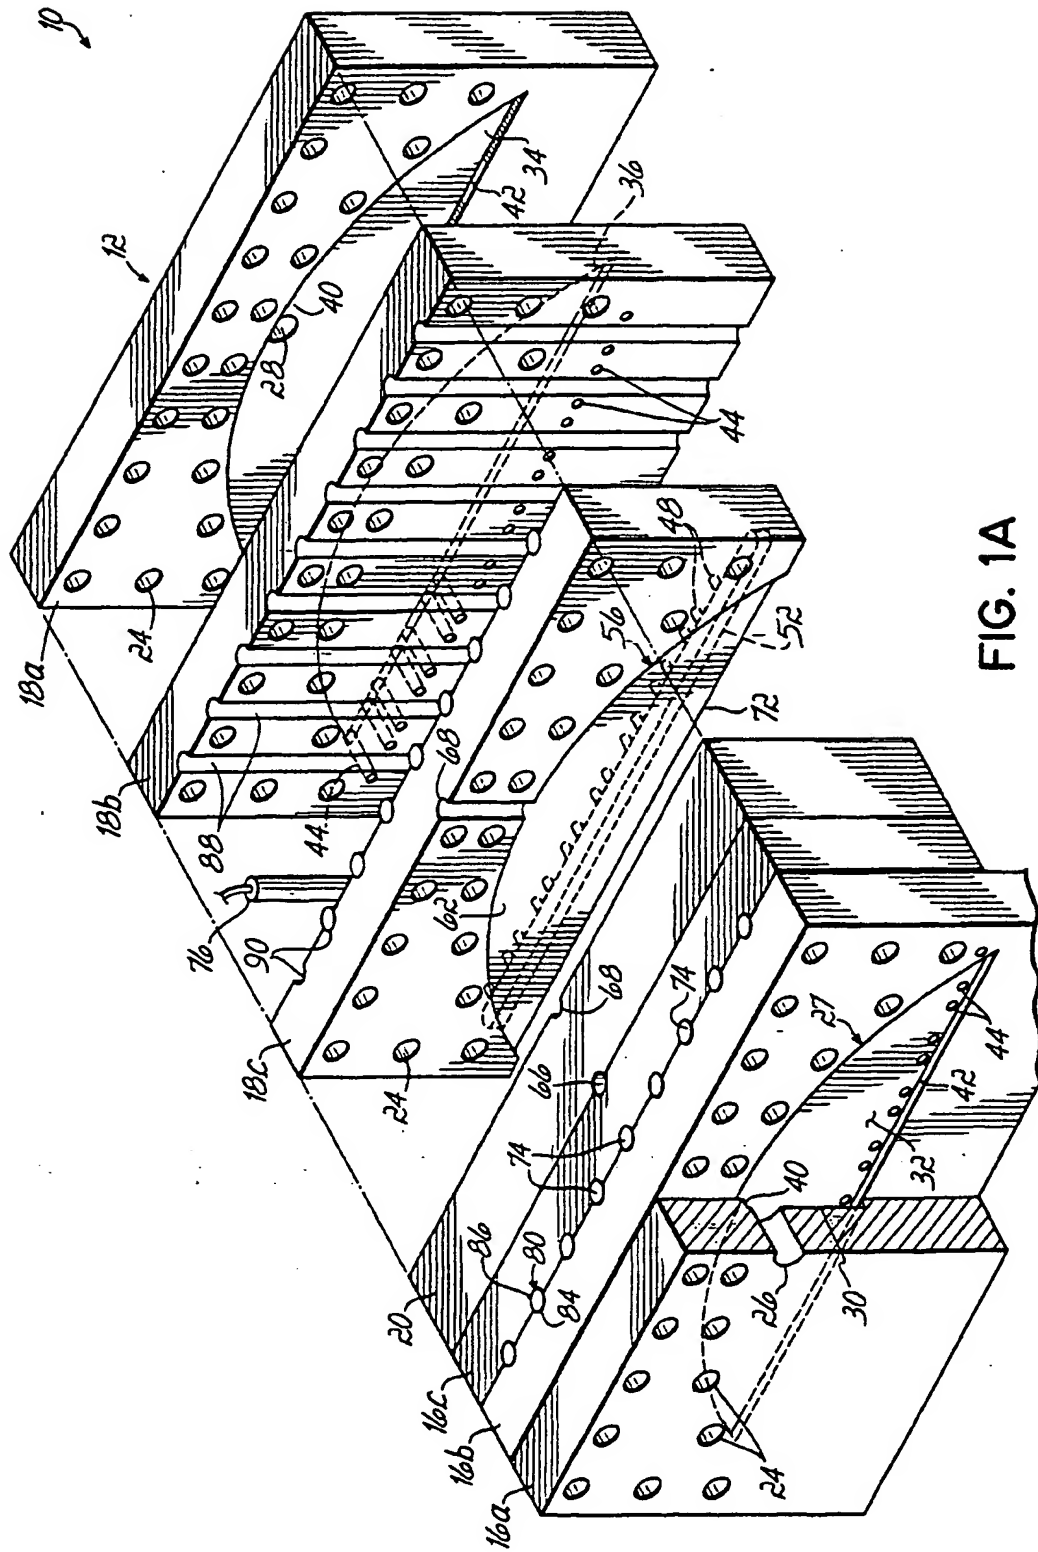


FIG. 1A



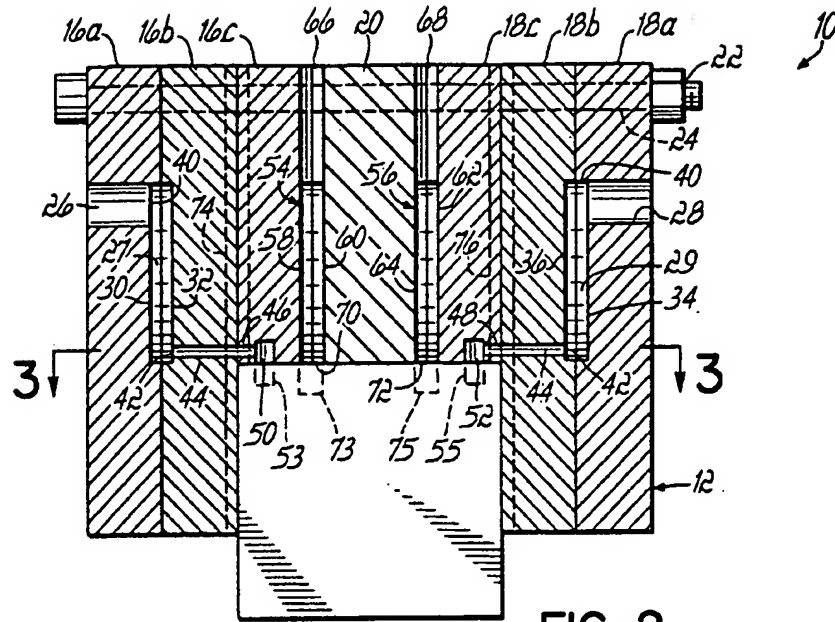


FIG. 2

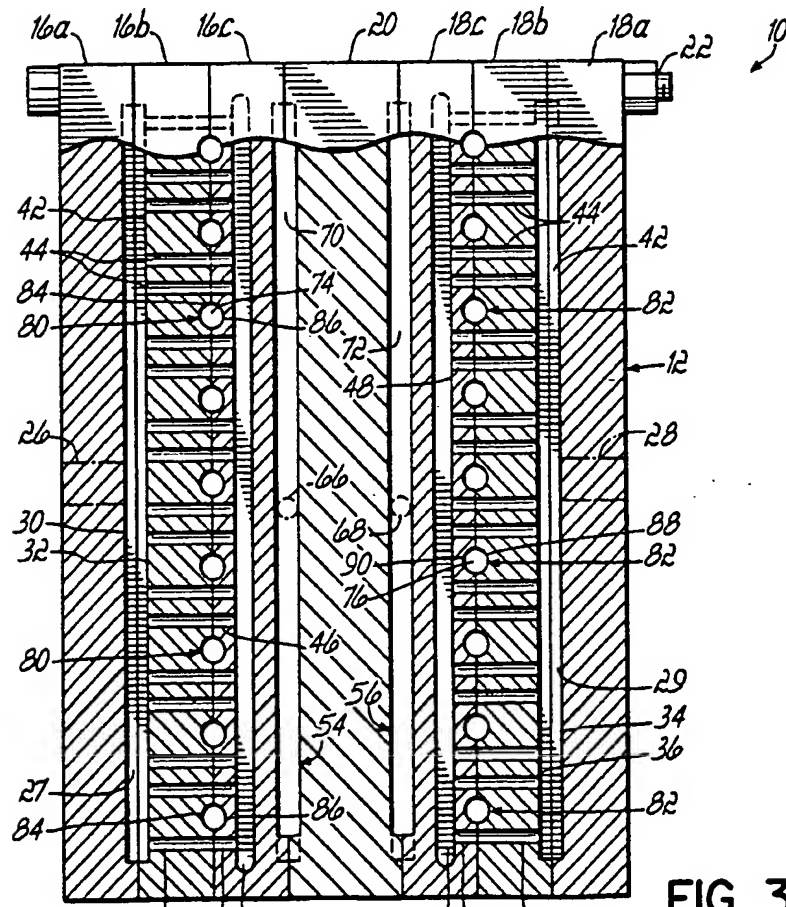


FIG 3

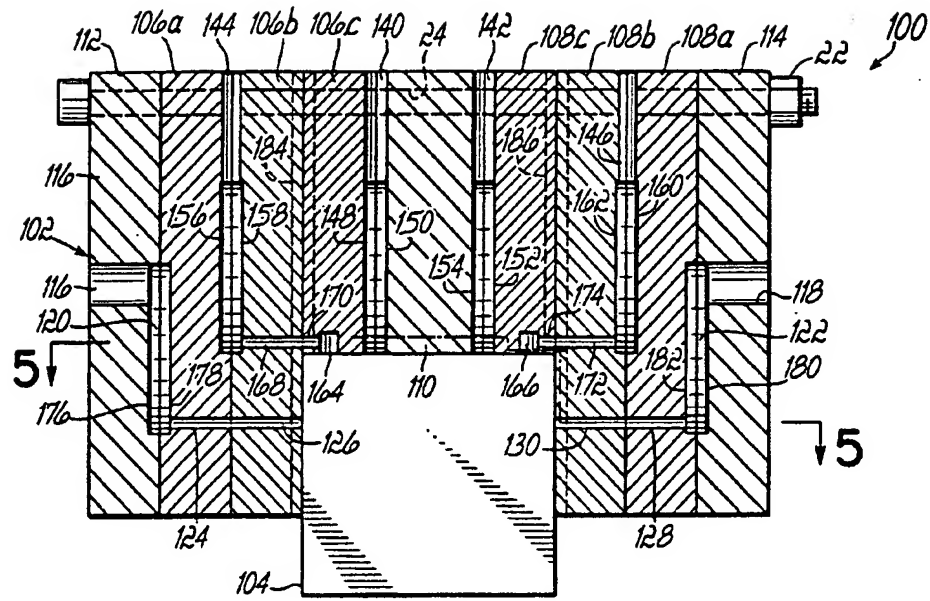


FIG. 4

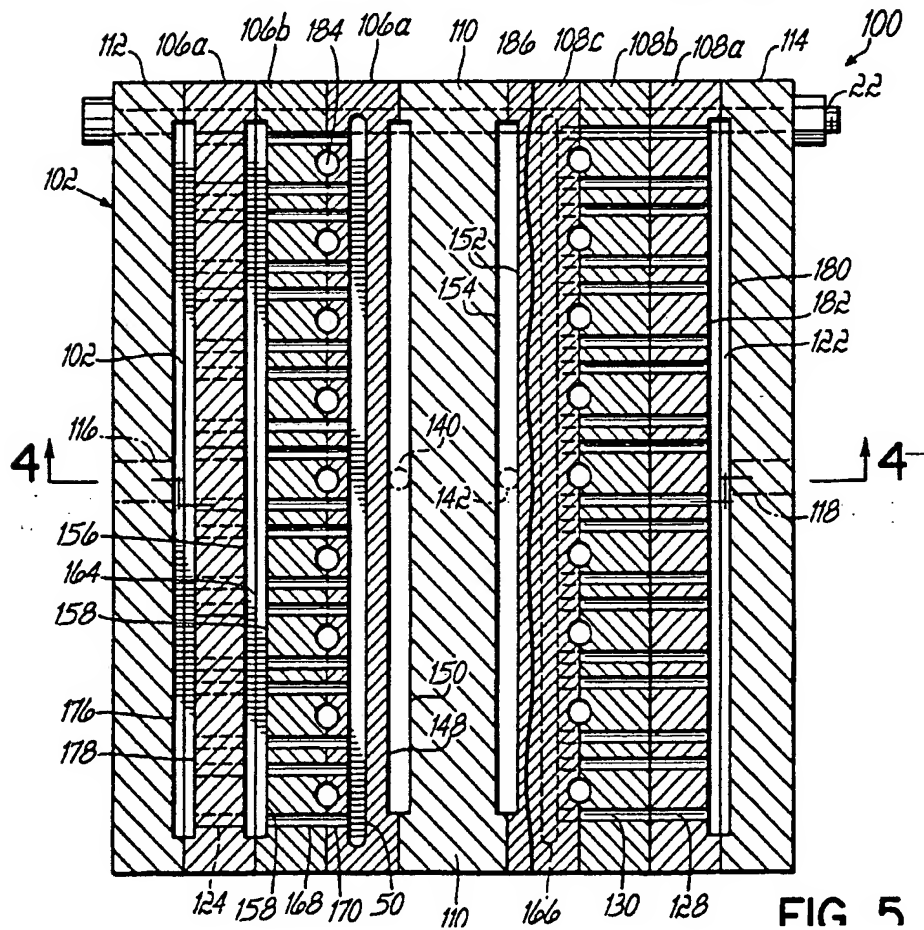


FIG. 5

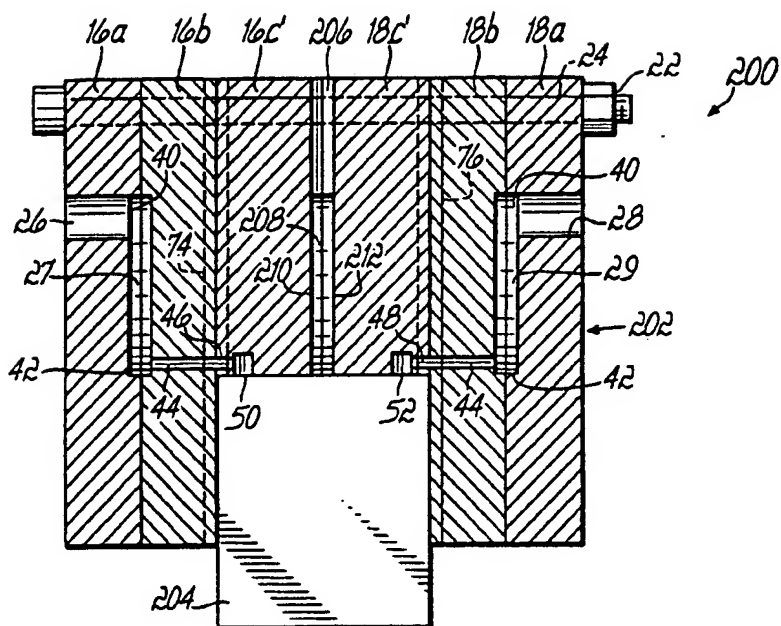


FIG. 6

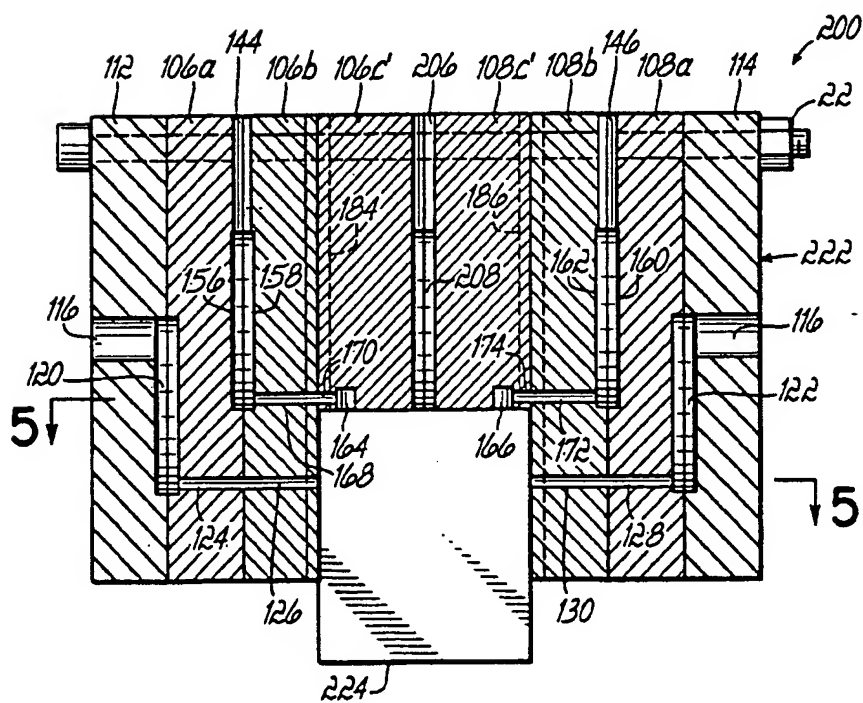


FIG. 7



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 04 02 0094

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 893 517 A (FABBRICANTE ANTHONY ; WARD GREGORY F (US); FABBRICANTE THOMAS (US)) 27 January 1999 (1999-01-27) * the whole document *	1-17	D01D4/06 D01D5/098 D01D5/30
A	US 6 491 507 B1 (ALLEN MARTIN A) 10 December 2002 (2002-12-10) * the whole document *	1-24	
A	US 5 017 116 A (CARTER DON E. ET AL) 21 May 1991 (1991-05-21) * the whole document *	1-24	
A	US 3 807 917 A (BAN K ET AL) 30 April 1974 (1974-04-30) * the whole document *	1-24	
A	US 3 501 805 A (DOUGLAS ROBERT POHLE JR ET AL) 24 March 1970 (1970-03-24) * the whole document *	1-24	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			D01D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		26 November 2004	Tarrida Torrell, J
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 (03.02.92) (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 02 0094

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-11-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0893517	A	27-01-1999	US 6114017 A	05-09-2000
			AU 4469897 A	16-02-1999
			DE 69727136 D1	12-02-2004
			DE 69727136 T2	14-10-2004
			EP 0893517 A2	27-01-1999
			WO 9904950 A1	04-02-1999
US 6491507	B1	10-12-2002	CN 1351199 A	29-05-2002
			DE 10153624 A1	13-06-2002
			JP 2002194615 A	10-07-2002
			US 2003038409 A1	27-02-2003
US 5017116	A	21-05-1991	AT 97174 T	15-11-1993
			DE 68910664 D1	16-12-1993
			DE 68910664 T2	28-04-1994
			EP 0376911 A2	04-07-1990
			ES 2045560 T3	16-01-1994
			JP 2221405 A	04-09-1990
			JP 2891425 B2	17-05-1999
US 3807917	A	30-04-1974	JP 51015124 B	14-05-1976
			CA 959213 A1	17-12-1974
			DE 2221697 A1	23-11-1972
US 3501805	A	24-03-1970	FR 1369679 A	14-08-1964
			GB 1030005 A	18-05-1966
			LU 45158 A1	03-03-1964

EPO FORM 1059

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82